


SRJ Multi-Shell Repair Clamp - Technical Datasheet

Intended use:

The SRJ Multi-Shell Repair Clamp (MSRC) is intended as an emergency or temporary repair solution for damaged or leaking pipework.

It is designed to encapsulate localised through-wall defects, or to reinforce sections of weakened, dented or damaged pipe, – restoring pipe integrity until a permanent repair can be planned and implemented.

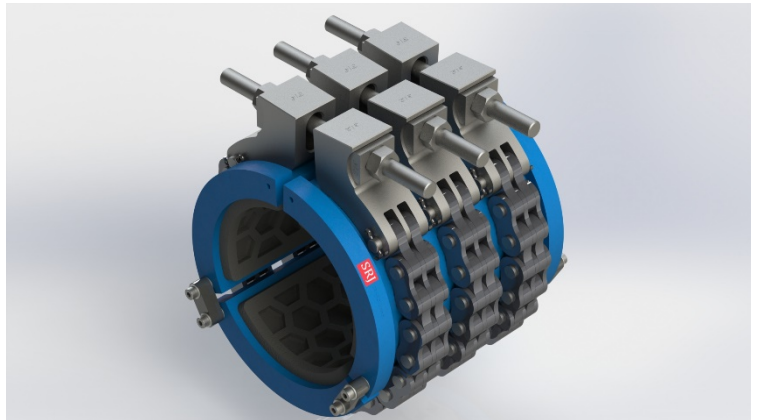

The MSRC should not be used to join pipe and does not provide axial pipe restraint. The use of a SRJ Coupling is recommended for pipe joining applications.

Product features:

- Unique hex pattern seal design provides multiple pressure boundaries, maximising effective sealing pressure.
- Available in different lengths and with various seal elastomer materials to suit a range of repair scenarios.
- Segmented, hinged housing provides increased tolerance for pipe ovality and allows for easy installation without disruption to piping system operation or the need for specialist tooling.
- Robust construction and protectively coated components provide durability in a range of hostile environments.
- Engineered to be refurbished and reuseable.

Technical specifications:

- Size range: nominal pipe diameters from 3” to 12” (80 mm to 300 mm)
- Operating temperature range^{[1][2]}:
 - -25 °C to +210 °C
- Maximum operating pressure^[3]:
 - 3” to 6” inclusive – up to 50 barg
 - 8” to 12” inclusive – up to 30 barg
- Storage temperature range: -20 °C to +70 °C
- Dimensions and weight: refer to product line datasheet

Notes:

[1] Quoted operating temperature range is for standard seal material (Viton); temperature limitations for other material options are available on request.

[2] Lower and higher temperatures can be tolerated for short working periods.

[3] For maximum hole size of diameter 15mm.

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. This information is taken from controlled laboratory tests, and any information recorded is reflective of the material. Actual results may vary dependent on material usage. SRJ Technologies Ltd assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

SRJ TECHNOLOGIES LTD
LE QUAI HOUSE
LE QUAI D'AUVERGNE
ST HELIER
JERSEY JE2 3TN
info@srj-technologies.com
www.srj-technologies.com



Multi-Shell Repair Clamp (MSRC) Product Line Datasheet

MSRC Type	Clamp Length (mm)	No. of Chains	Pressure Rating (barg)	Weight (kg)
3" Standard	354	5	50	13
3" Short	165	3	50	8
4" Standard	354	5	50	16
4" Short	179	3	50	9
6" Standard	450	6	50	36
6" Short	230	3	50	19
8" Standard	550	6	30	48
8" Short	230	3	30	24
10" Standard	658	6	30	82
10" Short	260	3	30	39
12" Standard	769	9	30	129
12" Short	260	3	30	47

Pressure ratings based upon test results.

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. This information is taken from controlled laboratory tests, and any information recorded is reflective of the material. Actual results may vary dependent on material usage. SRJ Technologies Ltd assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

SRJ TECHNOLOGIES LTD
LE QUAI HOUSE
LE QUAI D'AUVERGNE
ST HELIER
JERSEY JE2 3TN
info@srj-technologies.com
www.srj-technologies.com

